

il4033 Control Gear CC intra-profile TW DALI DT6

IL 4033 CC 100 DA TW

Control gear for light inserts Mid Power Linear TW and High Power Reflector TW




Main Features

- > Compact power supply unit for operation of selected il 4033 lighting inserts
- > Simple and unobtrusive installation within all il 4033 profiles
- > 2-channel control of brightness and colour temperature via DALI DT6
- > Automatic switch-off in case of overload, short-circuit or over-temperature
- > Operation with constant current: 900 mA SELV
- > Broadcast operation or addressed DALI operation possible
- > Protected against incorrect connection by coded plug connectors



Product Variations

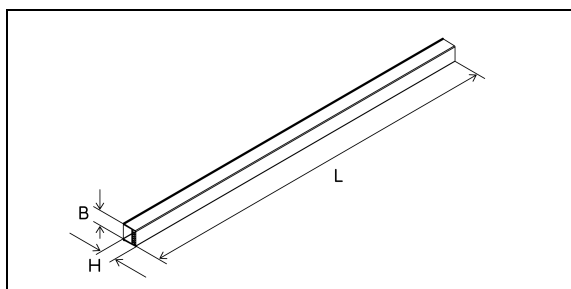

Specifications

Lifecycle Status	Active
Rated voltage AC	220 ... 240 V
Rated voltage DC	176 ... 288 V
Mains frequency	50 ... 60 Hz
Power consumption	96 W
Power factor	0.98
Degree of protection	IP20
Protection class	I
Output current	900 mA
Control input	2 x DALI (DT6)

Power Index range	68 ... 154
Ambient temperature	+5 ... +45 °C
Length	800 mm
Length (L)	800 mm
Width	38 mm
Width (B)	38 mm
Height	32 mm
Height (H)	32 mm
Dimmable/Controllable	yes
Weight	1 kg