


il4033 Control Gear CC external TW DALI DT6

IL 4033 CC 100 DA TW E

Control gear for light inserts Mid Power Linear TW and High Power Reflector TW

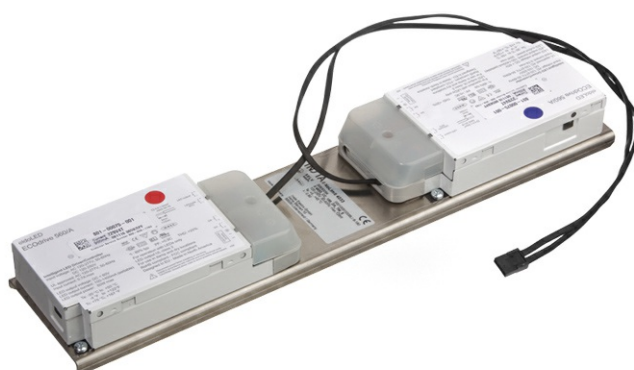


Main Features

- > Compact power supply unit for operation of selected il 4033 lighting inserts
- > External installation in false ceilings and recesses
- > 2-channel control of brightness and colour temperature via DALI DT6
- > Automatic switch-off in case of overload, short-circuit or over-temperature
- > Operation with constant current: 900 mA SELV
- > Broadcast operation or addressed DALI operation possible
- > Protected against incorrect connection by coded plug connectors



Product Variations

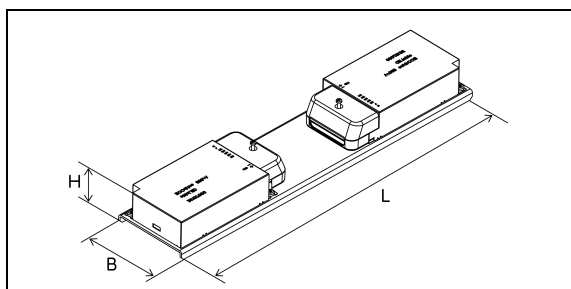

Specifications

Lifecycle Status	Active
Rated voltage AC	120 ... 277 V
Rated voltage DC	120 ... 250 V
Mains frequency	50 ... 60 Hz
Power consumption	128 W
Power factor	0.9
Degree of protection	IP20
Protection class	I

Output current	900mA
Control input	2 x DALI (DT6)
Power Index range	8 ... 180
Ambient temperature	+5 ... +45 °C
Length	385 mm
Width	85 mm
Height	40 mm
Dimmable/Controllable	yes
Weight	1 kg