


il4033 Control Gear CC external

Control gear for monochrome Mid Power Linear and High Power light inserts

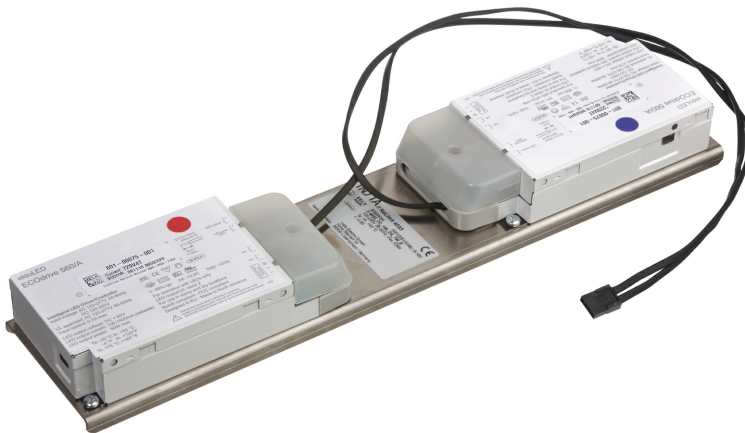


Main Features

- > Compact power supply unit for operation of selected il 4033 lighting inserts
- > External installation in false ceilings and recesses
- > Variants for switching or 1- or 2-channel brightness control via DALI available
- > Automatic switch-off in case of overload, short-circuit or over-temperature
- > Operation with constant current: 900 mA SELV
- > Broadcast operation or addressed DALI operation possible
- > Protected against incorrect connection by coded plug connectors



Product Variations

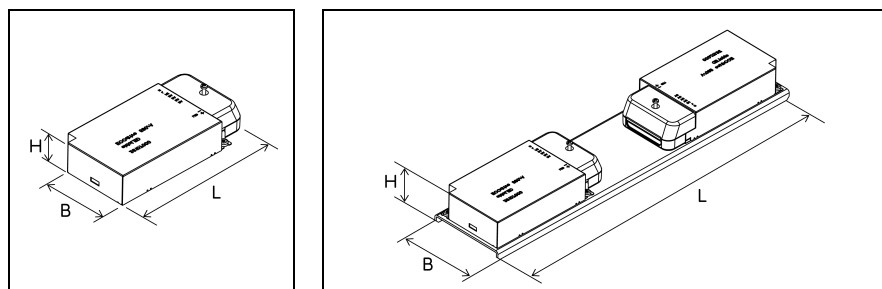

	Power consumption	Control input	Power Index range	Length (L)	Width (B)	Height (H)	Weight
il 4033 CC 50 DA E	64 W	DALI	4 ... 90	153 mm	77 mm	30 mm	0.4 kg
il 4033 CC 100 2DA E	128 W	2 x DALI	4 ... 90 (Per output)	385 mm	85 mm	40 mm	1 kg

Specifications

Lifecycle Status	Active	Standby Power consumption	< 0.5 W
Rated voltage AC	120 ... 277 V	Degree of protection	IP20
Rated voltage DC	120 ... 250 V	Protection class	I
Mains frequency	50 ... 60 Hz	Output current	900 mA
Power factor	0.9	Ambient temperature	+5 ... +45 °C
		Dimmable/Controllable	yes