

il4033 Control Gear CC intra-profile

Control gear for single colour Mid Power Linear and High Power light inserts




Main Features

- > Compact power supply unit for operation of selected il 4033 lighting inserts
- > Simple and unobtrusive installation within all il 4033 profiles
- > Variants for switching or 1- or 2-channel brightness control via DALI available
- > Automatic switch-off in case of overload, short-circuit or over-temperature
- > Operation with constant current: 900 mA SELV
- > Broadcast operation or addressed DALI operation possible with the DALI variants
- > Protected against incorrect connection by coded plug connectors



Product Variations

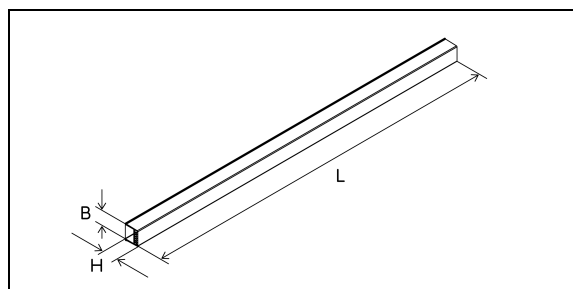

	Power consumption	Power factor	Control input	Power Index range	Dimmable/Controllable
IL 4033 CC 50 DA	55 W	0.95	DALI	26 ... 89	yes
IL 4033 CC 50	56 W	0.98		26 ... 89	no
IL 4033 CC 85 2DA	99 W	0.98	2 x DALI	2 x 34 ... 2 x 77	yes

Specifications

Lifecycle Status	Active
Rated voltage AC	220 ... 240 V
Rated voltage DC	176 ... 278 V
Mains frequency	50 ... 60 Hz
Standby Power consumption	< 0.15 W
Degree of protection	IP20

Protection class	I
Output current	900 mA
Ambient temperature	+5 ... +45 °C
Length (L)	800 mm
Width (B)	38 mm
Height (H)	32 mm
Weight	1 kg