


il4033 Control Gear CC external TW DALI DT8


IL 4033 CC 50 DA DT8 TW E

Control gear for lighting inserts High Power Optik TW, Akzent TW and Spotlight TW

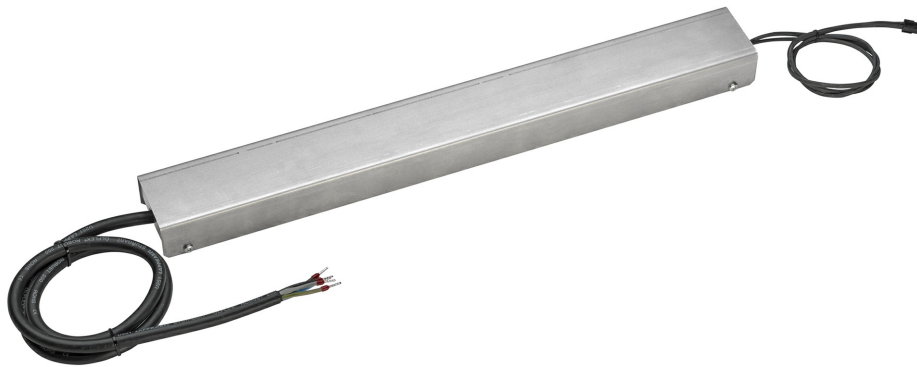

Main Features

- > Compact power supply unit for operation of selected il 4033 lighting inserts
- > External installation in false ceilings and recesses
- > 1-channel control of brightness and colour temperature via DALI DT8
- > Automatic switch-off in case of overload, short-circuit or over-temperature
- > Operation with constant current: 900 mA SELV
- > Broadcast operation or addressed DALI operation possible
- > Protected against incorrect connection by coded plug connectors



Specifications

Lifecycle Status	Active
Rated voltage AC	220 ... 240 V
Rated voltage DC	176 ... 280 V
Mains frequency	50 / 60 Hz
Power consumption	56 W
Power factor	0.97
Standby Power consumption	< 0.25 W
Degree of protection	IP20
Protection↻ class	I

Output current	900 mA
Control input	DALI TW (DT8)
Power Index range	34 ... 77
Ambient temperature	-25 ... +50 °C
Length	580 mm
Width	67 mm
Height	35 mm
Dimmable/Controllable	yes
Weight	1.4 kg