

il4033 Control Gear CV intra-profile

IL_4033_CV_60

Control gear for Low Power Linear light inserts




Main Features

- > Compact power supply unit for operation of selected il 4033 lighting inserts
- > Simple and unobtrusive installation within all il 4033 profiles
- > Switching of Low Power Linear light inserts
- > Automatic switch-off in case of overload, short-circuit or over-temperature
- > Operation with constant voltage: 24 V DC SELV
- > Protected against incorrect connection by coded plug connectors



Product Variations

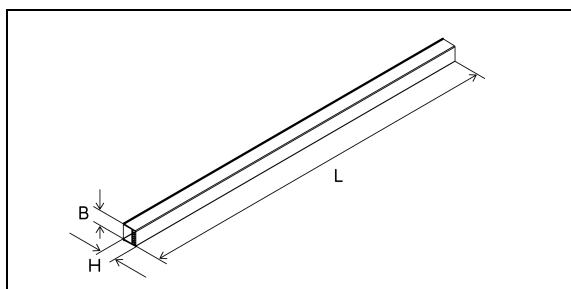

Specifications

Lifecycle Status	Active
Rated voltage	AC 220 ... 240 V ~
Mains frequency	50 ... 60 Hz
Power consumption	67 W
Power factor	0.95
Standby Power consumption	1.0 W
Primary current	max. 300 mA
Degree of protection	IP20
Protection class	I

Output voltage	DC 24 V
Output current	0 ... 2040 mA
Connected load	0 ... 57 W
Power Index range	0 ... 105
Ambient temperature	+5 ... +45 °C
Length	800 mm
Width	38 mm
Height	32 mm
Weight	1 kg