


il4033 Control Gear CV external

## Control gear for Low Power Linear light inserts




### Main Features

- > Compact power supply unit for operation of selected il 4033 lighting inserts
- > External installation in false ceilings and recesses
- > Switching of Low Power Linear light inserts
- > Automatic switch-off in case of overload, short-circuit or over-temperature
- > Operation with constant voltage: 24 V DC SELV
- > Protected against incorrect connection by coded plug connectors



# Product Variations

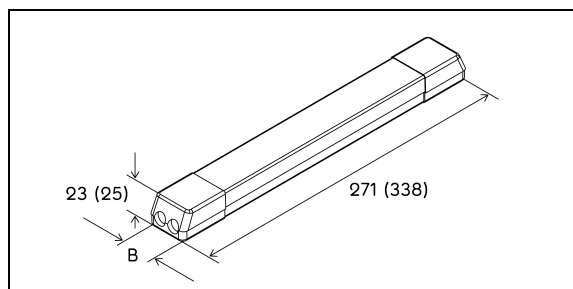

	Power consumption	Power Index range	Length (L)	Height (H)
il 4033_CV_60_E	67 W	0 ... 105	271 mm	23 mm
il 4033_CV_100_E	110 W	0 ... 177	338 mm	25 mm

# Specifications

Lifecycle Status	Active
Rated voltage	AC 220 ... 240 V ~
Mains frequency	50 ... 60 Hz
Power factor	0.95
Standby Power consumption	1.0 W

Degree of protection	IP20
Protection class	II
Output voltage	DC 24 V
Ambient temperature	+5 ... +45 °C
Width (B)	35 mm
Weight	0.3 kg