
Standleuchte FSL1

FSL1-80-840-0-F-M-BM

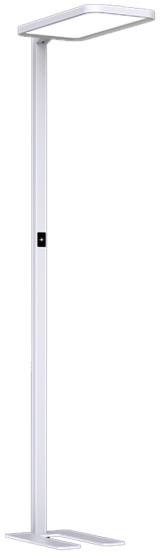

Product features

The FSL1 100 floor lamp embodies modern lighting design and optimal working conditions in the office. It ensures balanced and pleasant illumination that facilitates visual tasks and provides lasting support for visual comfort. The combination of direct and indirect light creates a harmonious distribution of brightness, making spaces feel both vibrant and serene. At the same time, this balanced blend contributes to an atmosphere conducive to focused work. Featuring intelligent controls, this energy-efficient solution adapts flexibly to usage patterns, thereby supporting cost-effective operation. Thus, the FSL1 100 unites functionality, efficiency, and timeless design in a high-quality lighting solution for modern work environments.

Technical specifications

Control	Luminous flux	Indirect luminous flux	Light color	Protection class
motion detector	3000 lm	5000 lm	4000 K	IP20

Lifespan	50,000 h
Ambient temperature	+5 ... + 25 ° C
Storage & transport temperature	-20 ... + 70 ° C
Nominal voltage	AC 220-240 V
Nominal frequency	50/60Hz
Weight	14.5kg

Housing material	aluminum
Protection class	I.
Protection class	IP20
Colour reproduction	typ. 85

Dimensions

Width (B)	Height (H)	Length (L)
310 mm	1950mm	610mm

Due to the constant further development and improvement of LED technology, changes are possible
© InstaLighting GmbH, Technical changes reserved
Instalighting GmbH, Oststraße 14-16, 59929 Brilon, Germany
Telephone: + 49 2351 65619-0, sales@instalighting.de, www.instalighting.de

Standleuchte FSL1

FSL1-80-840-0-F-M-BM

Further product features



Additional Information

www.instalighting.de

Due to the constant further development and improvement of LED technology, changes are possible
© InstaLighting GmbH, Technical changes reserved
Instalighting GmbH, Oststraße 14-16, 59929 Brilon, Germany
Telephone: + 49 2351 65619-0, sales@instalighting.de, www.instalighting.de