

LEDLUX LX RGBW plane

VV-LL LX RGBW PQ200 (...)

Light insert





The flat RGBW light insert stands out through its dynamic light and can be integrated into the architecture in a modular fashion. In so doing, the light element fascinates through its precisely controllable coloured light, flat construction height and high-quality white light.

Main Features

- > Modular component system guarantees maximum design flexibility and scalability in the object
- > Brilliant white light, rich colours and pastel shades from one luminaire by combining RGB and white LED
- > Background illumination of surfaces thanks to small mounting dimensions



Product Variations

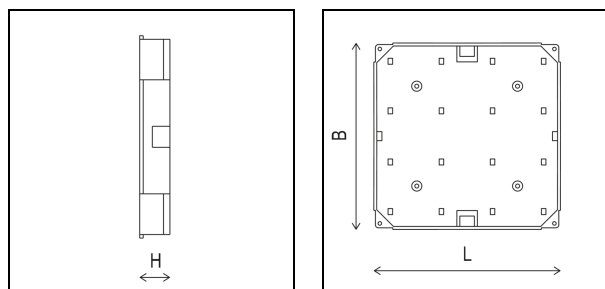

Specifications

| | |
|-------------------------------------|----------------|
| Power consumption | 7.3 W |
| Protection class | III |
| Optics | None |
| Beam angle direct | 120° |
| Max luminous flux direct | 534 lm |
| Luminous flux direct (green) | 40 lm |
| Luminous flux direct (red) | 24 lm |
| Luminous flux direct (white) | 534 lm |
| Luminous flux direct (blue) | 8 lm |
| Light colour | RGBW |
| Ambient temperature | -20 ... +45 °C |
| Length (L) | 187 mm |
| Width (B) | 187 mm |

| | |
|--------------------------------------|----------------|
| Height (H) | 12 mm |
| Dimmable/Controllable | Yes |
| Interface | LEDTRIX |
| Housing colour | White |
| Weight | 0.2 kg |
| Rated voltage DC | 28 V SELV |
| Storage/transport temperature | -20 ... +60 °C |
| Service life (L80/B10) | 60,000 h |
| Connection mode | Plug connector |
| Cable length | 125 mm |
| Housing material | Plastic |
| Cover material | None |
| Glow-wire testing | 850 °C |

Accessories



SNT ELI 0-120 W
58916023



SNT ELI 0-57 W
58916030




SNT ELI 0-9 W Molex plug 3-pole
58910003



instalight Control LEDTRIX Master
50913000



instalight Vario basic device
V2 GR 001



instalight Vario interface module LEDTRIX
V2 FM LX 001



SNT ELI 0-110 W / 30 V
50930074



DMX-LEDTRIX Gateway 2 channel, built-in
51688014